



30W COB
LED DOWNLIGHT
180°rotatable

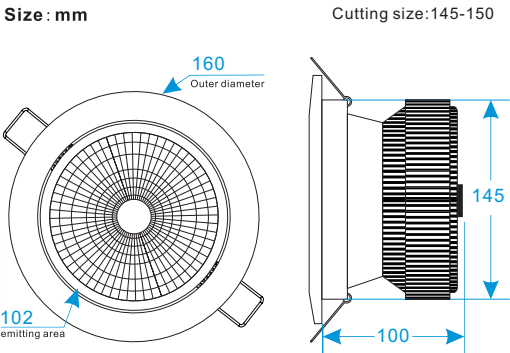

D30145

 NETWEIGHT 1.3KG	 CUTTINGSIZE 145-150MM	 PACKING 1 PC 18.5X18.5X14CM	 PACKING 12 PC 57.5X38.5X30CM
---	---	--	---

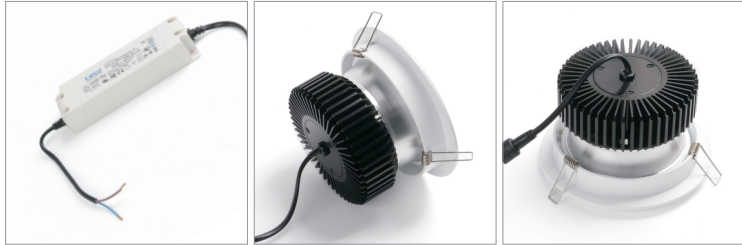

Features:
High color rendering,uniform luminance,no light spot,no dark space.It was different from the lighting effects of general LED DOWNLIGHT in the market,substitute to the traditional lamp completely,and no maladjustment.

Application:
Products are widely used as indoor main illumination lighting in the office,commercial center,shopping mall,supermarket,factory,etc.



Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100V-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	30W	
System Consumption	34.5W	
Led Initial Flux	2550-2750LM	3300-3700LM
Color Rendering Index	>80	
Working Temperature	-40℃ ~ +55℃	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC27-42V 700mA
Power Factor	0.9~0.96
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali / 1-10V / WIFI
MWANWELL:PLD-40-700 is optional	

Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
D30145	25°/55°	>80	3000K	2550LM	3300LM	AC100V-277V AC200V-240V
			4000K	2650LM	3500LM	
			6000K	2750LM	3700LM	

