


20W COB  
LED DOWNLIGHT  
360°rotatable



D20170

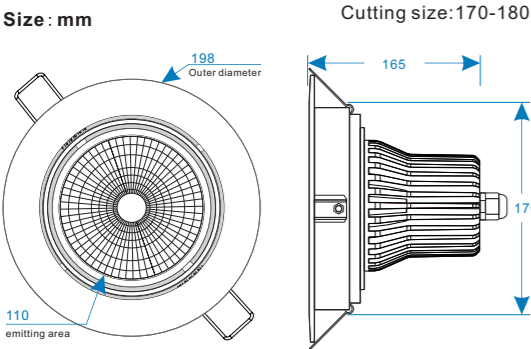

**Features:**  
High color rendering,uniform luminance,no light spot,no dark space.It was different from the lighting effects of general LED DOWNLIGHT in the market,substitute to the traditional lamp completely,and no maladjustment.

**Application:**  
Products are widely used as indoor main illumination lighting in the office,commercial center,shopping mall,supermarket,factory,etc.

<b>NETWEIGHT</b> 1.6 Kg	<b>CUTTINGSIZE</b> 170-180mm	<b>PACKING</b> 1 pc	<b>PACKING</b> 8 pc
		205x205x190mm	430x430x420mm



Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100V-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	20W	
System Consumption	23W	
Led Initial Flux	1650-1900LM	2200-2600LM
Color Rendering Index	>80	
Working Temperature	-40℃ ~ +55℃	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	white	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC27-42V 500mA
Power Factor	0.9-0.97
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali / 1-10V / WIFI
MWANWELL:APC-25-500 is optional	

Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
D20170	25°/55°	>80	3000K	1650LM	2200LM	AC100V-277V AC200V-240V
			4000K	1850LM	2400LM	
			6000K	1900LM	2600LM	

