



**RECTANGULAR**  
**3X6W COB**  
**LED CEILING LIGHT**  
 180°rotatable



Size : mm

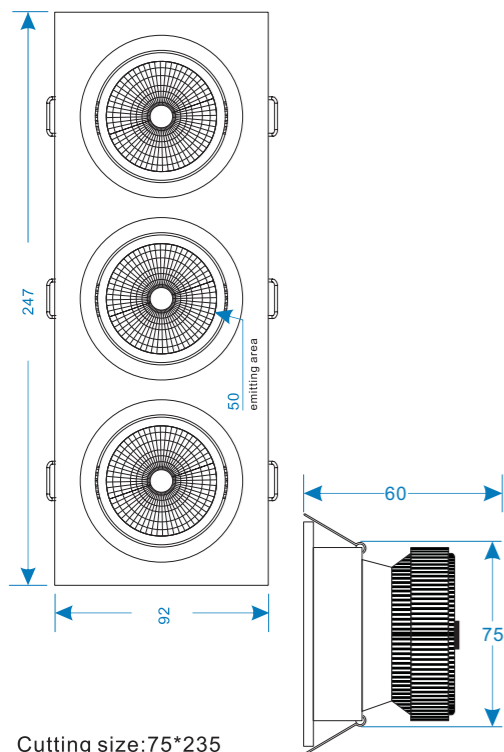

Cutting size:75\*235

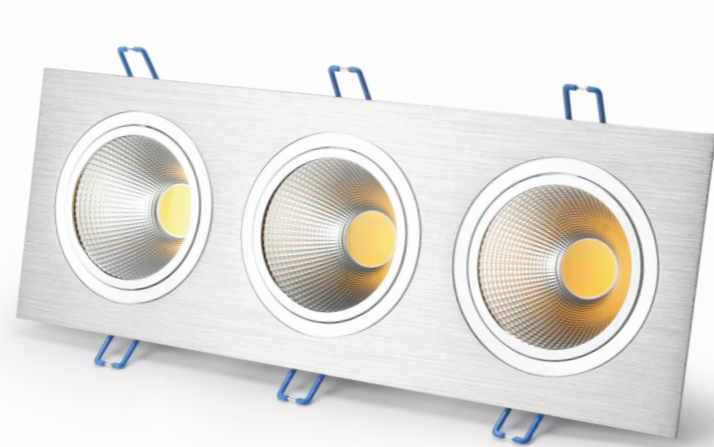

**C06753**


<b>NETWEIGHT</b> 0.9KG	<b>CUTTINGSIZE</b> 75X235MM	<b>PACKING</b> 1 PC 18X12.4X11.5CM	<b>PACKING</b> 12PC 52.5X38.5X24.5CM
---------------------------	--------------------------------	--	--

**Features:**

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment

**Application:**


Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

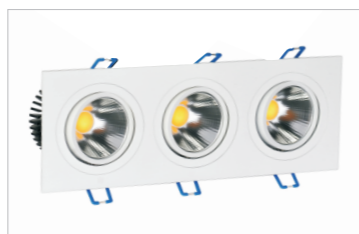


Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	18W	
System Consumption	22.5W	
Led Initial Flux	1620LM-1740LM	1710LM-1890LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC18-30V 350mA
Power Factor	0.9~0.97
Power Efficiency	80%
Certificate	CE TUV CQC
Dimmable	Triac / dali / 1-10V / WIFI
MEANWELL : APC-12-350 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
C06753	30°/50°	>80	3000K	1620LM	1710LM	AC100-277V AC200-240V
			4000K	1680LM	1800LM	
			6000K	1740LM	1890LM	

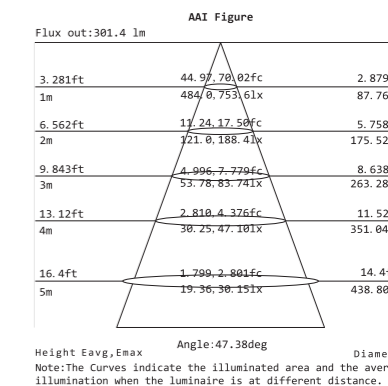


Graphical Representation for  
**D0675 WW 50° (S)**

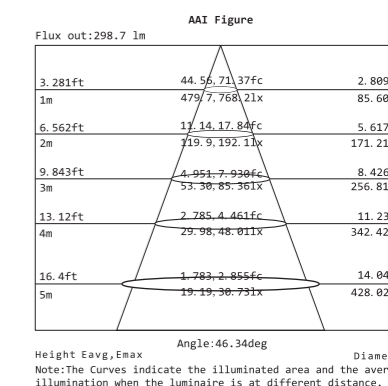

Graphical Representation for  
**D0675 NW 50°**

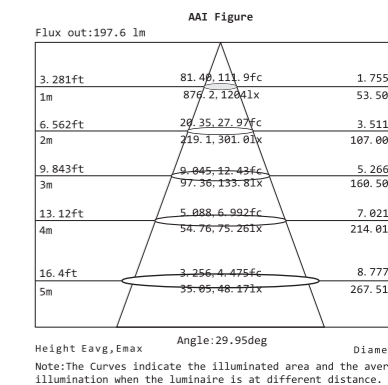

Graphical Representation for  
**D0675 NW 30° (S)**

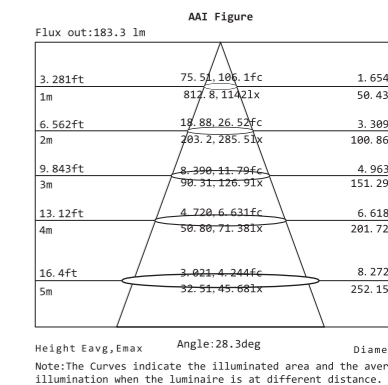

Graphical Representation for  
**D0675 WW 30°**