


RECTANGULAR
3X10W COB
LED CEILING LIGHT
180°rotatable



Size : mm

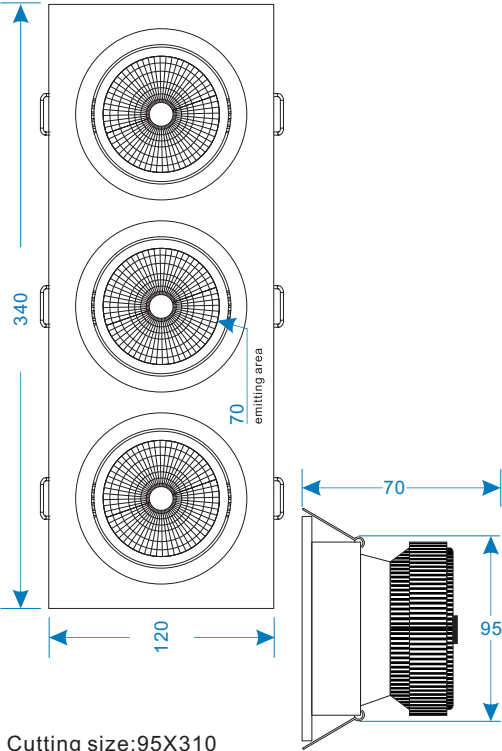

Cutting size:95X310



C10953

 NETWEIGHT 1.3KG	 CUTTINGSIZE 95X310MM	 PACKING 1 PC 33.6X15X12.5CM	 PACKING 6PC 47X36X28CM
---	--	--	---

Features:

High color rendering,uniform luminance,no light spot,no dark space.It was different from the lighting effects of general LED DOWNLIGHT in the market,substitute to the traditional lamp completely,and no maladjustment

Application:


Products are widely used as indoor main illumination lighting in the office,commercial center,shopping mall,supermarket,factory,etc.




Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	30W	
System Consumption	34.5W	
Led Initial Flux	2700LM-3300LM	3450LM-4050LM
Color Rendering Index	>80	
Working Temperature	-40℃ ~ +55℃	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC18-30V 350mA
Power Factor	0.9~0.97
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali / 1-10V / WIFI
MEANWELL : PLD-16-350 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
C10953	30°/50°	>80	3000K	2700LM	3450LM	AC100-277V AC200-240V
			4000K	2850LM	3750LM	
			6000K	3300LM	4050LM	

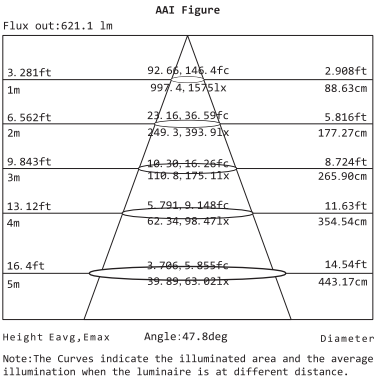


Graphical Representation for
D1095 WW 50° (S)

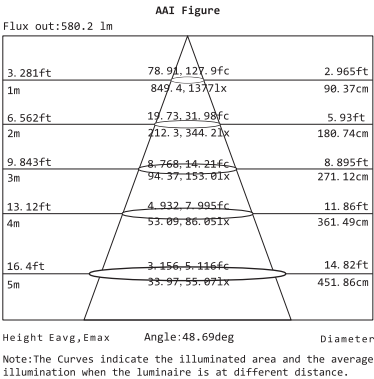

Graphical Representation for
D1095 NW 50°

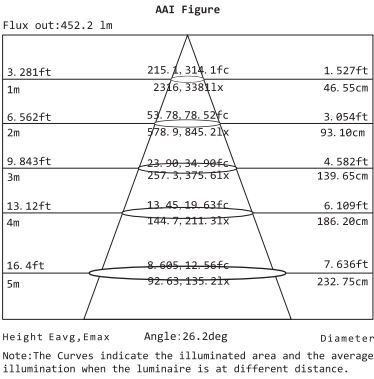

Graphical Representation for
D1095 NW 30° (S)

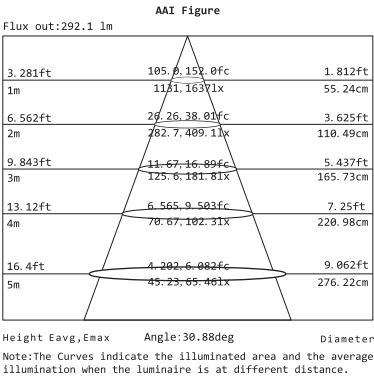

Graphical Representation for
D1095 WW 30°