

10W COB LED TRACK LIGHT

360° rotatable




Features:

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment.

Application:

Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

T1021




2-wires Track holder



NETWEIGHT
0.7KG

T1031




3-wires Track holder



PACKING
1PC
16.5X11X23CM

T1043





4-wires Track holder



PACKING
9PC
51.5X24.5X35CM

Size : mm

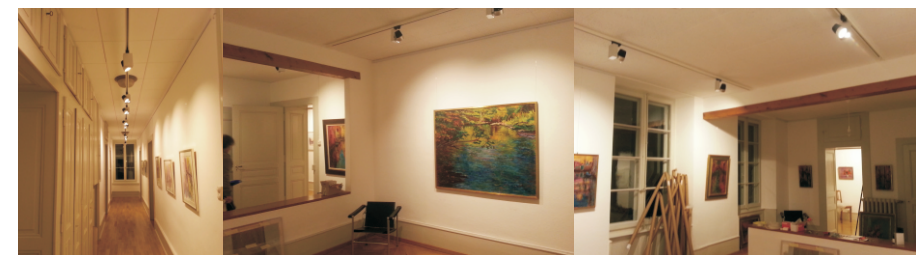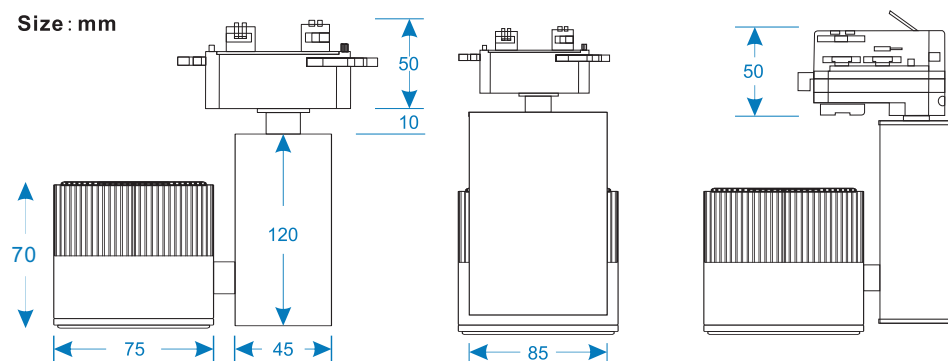


Lamp Parameters :

	Standard	Super-bright
Input Voltage	AC100-277V or AC200-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	10W	
System Consumption	11.5W	
Led Initial Flux	900-1100LM	1150LM-1350LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black,white,silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	


Driver Parameters :

Brand	Lifud
Input	AC100-277V or AC200-240V
Output	DC18-30V,350mA
Power Factor	0.9~0.97
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali
MEANWELL: PLD-16-350 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T1021	30°/50°	>80	3000K	900LM	1150LM	AC100-277V AC200-240V
T1031			4000K	950LM	1250LM	
T1043			6000K	1100LM	1350LM	

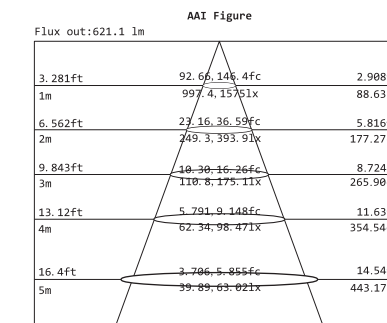


Height Eavg,Emax Angle:47.8deg Diameter
Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

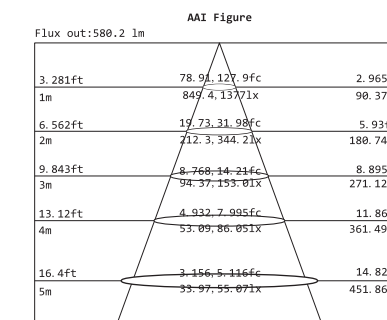

Height Eavg,Emax Angle:48.69deg Diameter
Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

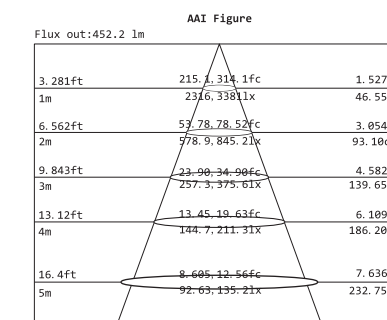

Height Eavg,Emax Angle:26.2deg Diameter
Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

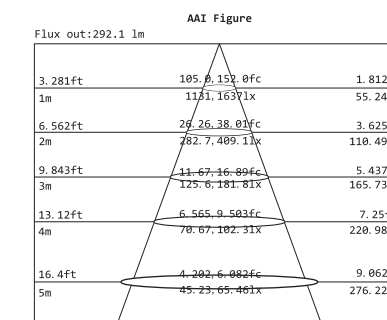

Height Eavg,Emax Angle:30.88deg Diameter
Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.