

40W COB LED TRACK LIGHT

360° rotatable




Features:

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment.

Application:

Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.


T4021



2-wires Track holder




T4031



3-wires Track holder




T4043



4-wires Track holder



Size : mm

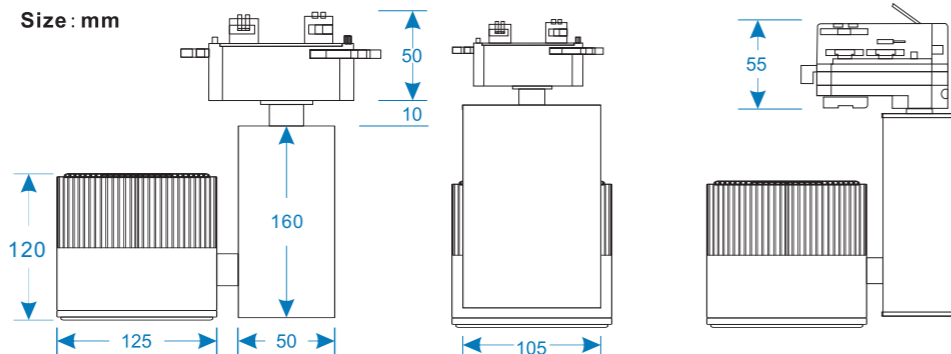

Lamp Parameters :


	Standard	Super-bright
Input Voltage	AC100-277V or AC200-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	40W	
System Consumption	45W	
Led Initial Flux	3400-3800LM	4100-4800LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black,white,silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :

Brand	Lifud
Input	AC100-277V or AC200-240V
Output	27-42VDC, 1000mA
Power Factor	0.9-0.96
Power Efficiency	87%
Certificate	UL, FCC, CE, SAA, PSE, CQC, TUV UL Certificate Number: E338140 SAA Certificate Number: TUV16071EA
Dimmable	Triac / dali
MWANWELL: PLD-40-1050 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T4021 T4031 T4043	25°/55°	>80	3000K	3400LM	4100LM	AC100-277V AC200-240V
			4000K	3600LM	4500LM	
			6000K	3800LM	4800LM	

AAI Figure

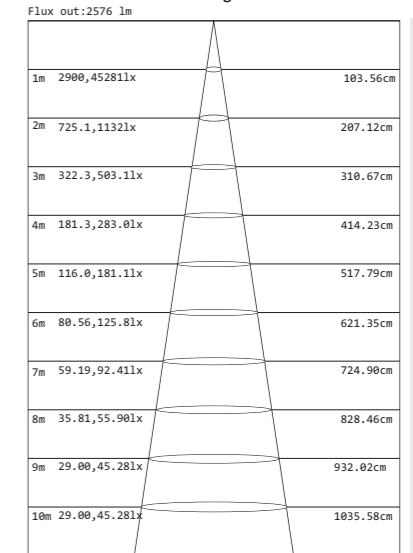


Graphical Representation for D40165WW 55°

AAI Figure

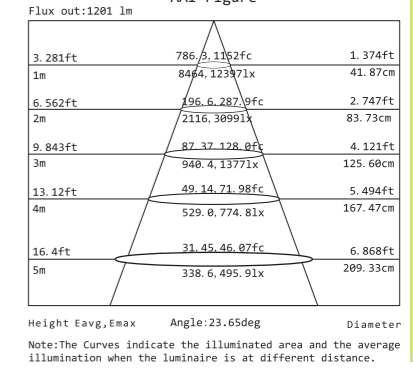

Graphical Representation for D40165 NW 25° (S)

AAI Figure

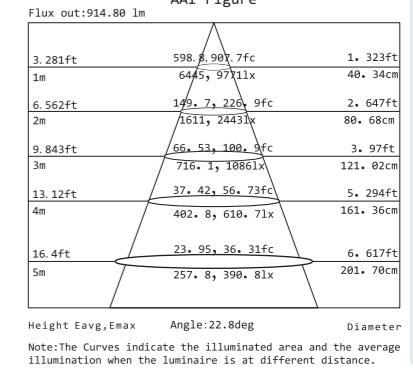

Graphical Representation for D40165 WW 25°