
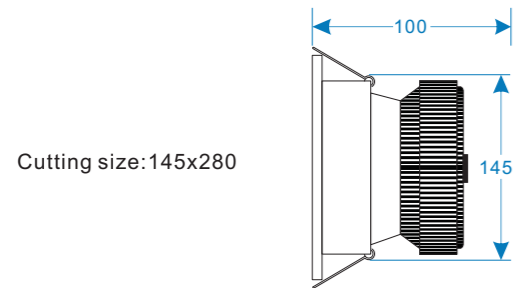


**RECTANGULAR**  
**2X30W COB**  
**LED CEILING LIGHT**  
180°rotatable

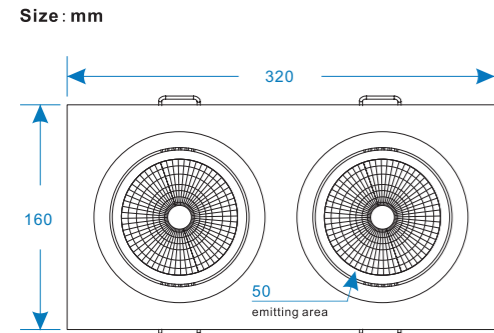

**C301452**

<b>NETWEIGHT</b> 3.2KG	<b>CUTTINGSIZE</b> 145x280MM	<b>PACKING</b> 1PC 18.5X32.5X14CM	<b>PACKING</b> 4PC 33.5X38.5X30CM
---------------------------	---------------------------------	---	---

**Features:**

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment

**Application:**


Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.




Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	60W	
System Consumption	69W	
Led Initial Flux	5100LM-5500LM	<b>6600LM-7400LM</b>
Color Rendering Index	>80	
Working Temperature	-40℃ ~ +55℃	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC27-42V 700mA
Power Factor	0.9-0.96
Power Efficiency	87%
Certificate	UL, FCC, CE, SAA, PSE, CQC, TUV UL Certificate Number: E338140 SAA Certificate Number: TUV16071EA
Dimmable	Triac / dali / 1-10V / WIFI
MEANWELL: LPD-40-700 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
C301452	25°/55°	>80	3000K	5100LM	<b>6600LM</b>	AC100-277V AC200-240V
			4000K	5300LM	<b>7000LM</b>	
			6000K	5500LM	<b>7400LM</b>	

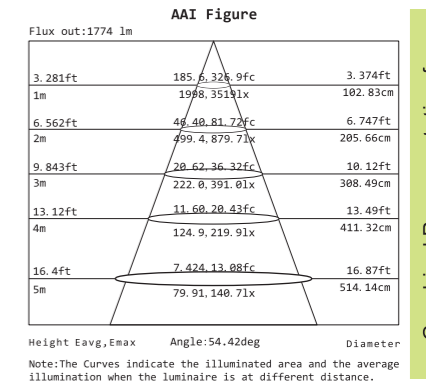


Graphical Representation for  
**D30145 WW 55° (S)**

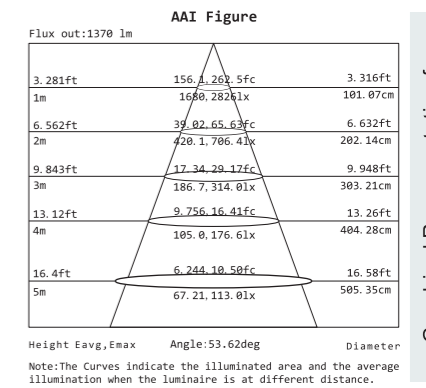

Graphical Representation for  
**D30145 WW 55°**

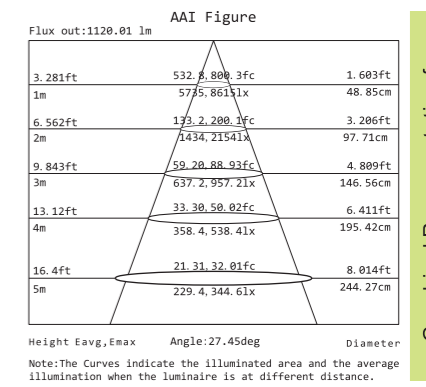

Graphical Representation for  
**D30145 NW 25° (S)**

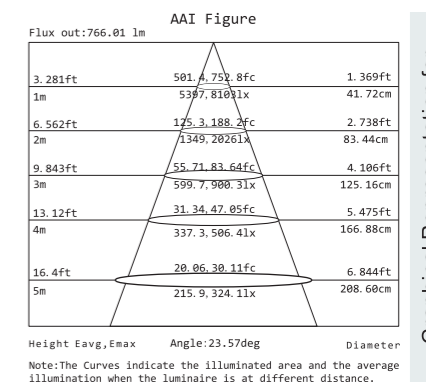

Graphical Representation for  
**D30145 NW 25°**