


RECTANGULAR
1X20W COB
LED CEILING LIGHT
180°rotatable



C201201

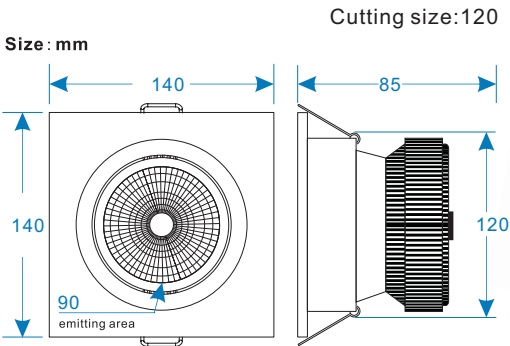

 NETWEIGHT 1.0KG	 CUTTINGSIZE 120-125MM	 PACKING 1 PC 14.5X16.5X12CM	 PACKING 12PC 45X30.5X26CM
---	---	--	--

Features:
High color rendering,uniform luminance,no light spot,no dark space.It was different from the lighting effects of general LED DOWNLIGHT in the market,substitute to the traditional lamp completely,and no maladjustment


Application:
Products are widely used as indoor main illumination lighting in the office,commercial center,shopping mall,supermarket,factory,etc.




Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	20W	
System Consumption	23W	
Led Initial Flux	1650-1900LM	2200-2600LM
Color Rendering Index	>80	
Working Temperature	-40℃ ~ +55℃	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC27-42V 500mA
Power Factor	0.9-0.97
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali / 1-10V / WIFI
MEANWELL:APC-25-500 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
C201201	30°/50°	>80	3000K	1650LM	2200LM	AC100-277V AC200-240V
			4000K	1850LM	2400LM	
			6000K	1900LM	2600LM	

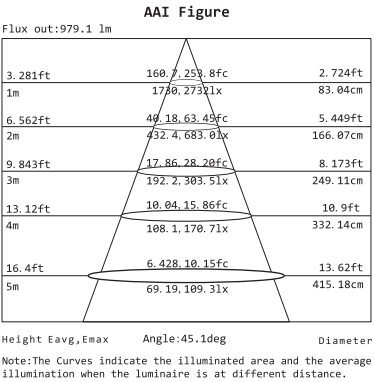


Graphical Representation for
D20120 WW 50°(S)

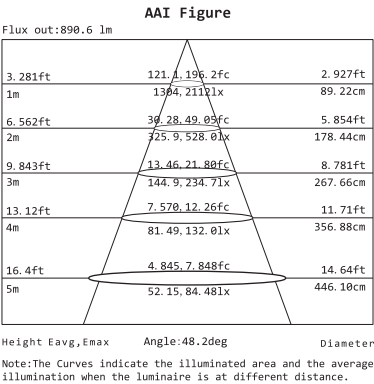

Graphical Representation for
D20120 NW 50°

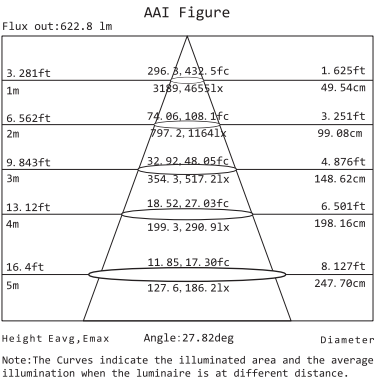

Graphical Representation for
D20120 NW 30°(S)

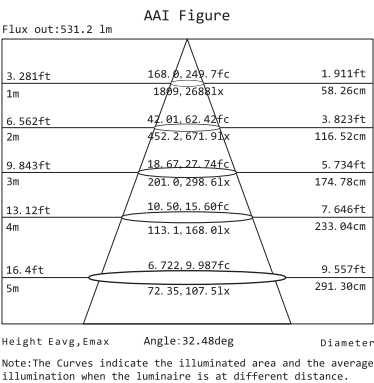

Graphical Representation for
D20120 WW 30°